

Specification Sheet

DRG35 Industrial Dryer




DRG35

Capacity (Wet)	16 kg
Volume	347 L
Drum Diameter	762 mm
Net Weight (Gas and Electric)	164 kg
Water (C.A.R.E)	1x Standard 19mm Cold Washing Machine Water Tap at 1.6m off Floor
Electricity	240 Volt – 50 hZ
Electrical Recommendations	Single Phase Standard GPO, 10 Amp Individual Circuit Required
Gas Connection	12.7 mm Gas Isolating Cock
Gas Heating	95 MJ
Gas Pressure	Min = 1.13kPa Rec = 1.62kPa Max = 2.61kPa
Flue Diameter	Ø 203 mm
Exhaust Flow Rate (50khz)	260 L/s
Flue Termination	2 x 90° Bends terminating 500mm from roof line – No Mesh or Chinaman's Hats

***Please allow a 25mm gap on sides and a 100mm gap on top if dryer is to be built into an enclosed space.**

DRG35

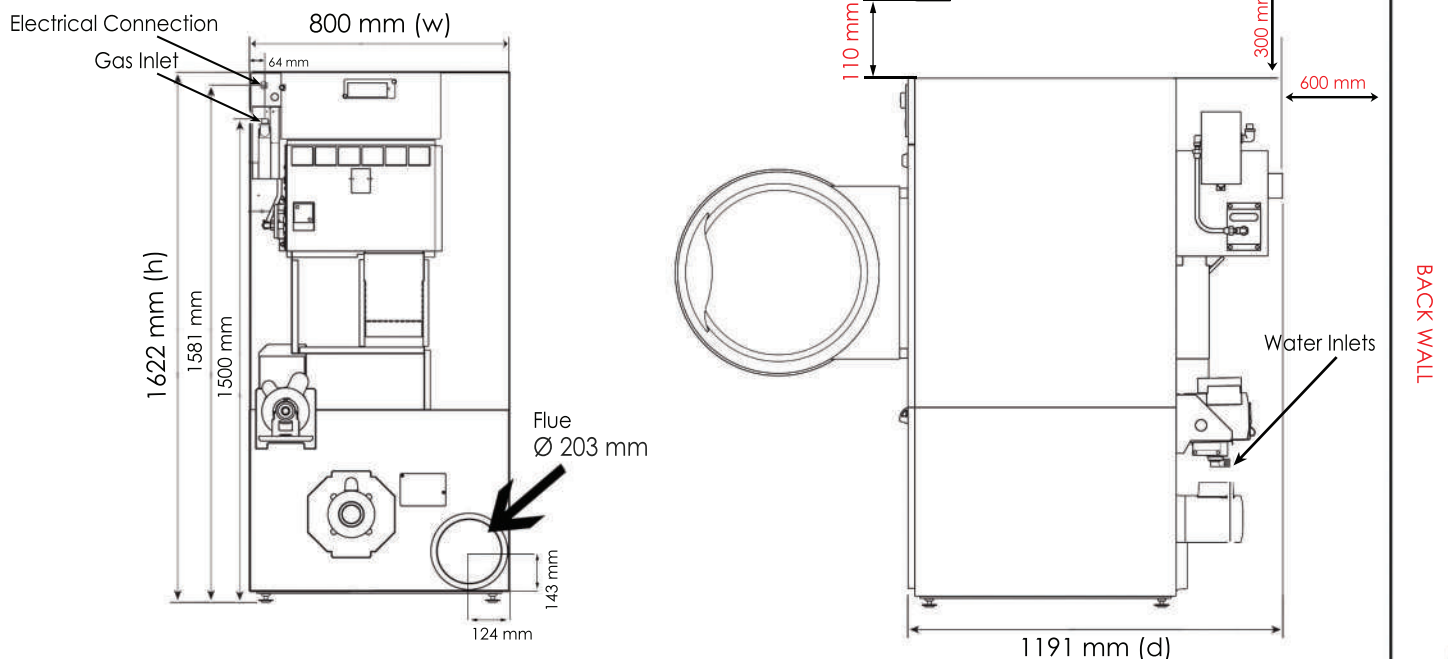

B-Electrical
Services

EnviroSaver
Ozone Laundry Disinfection

Tel: (08) 8337 7394

(08) 8337 7216

www.b-electrical.com.au